






酷睿创显
Creative Media

CM-FQ-Q2 Specification-V3.0

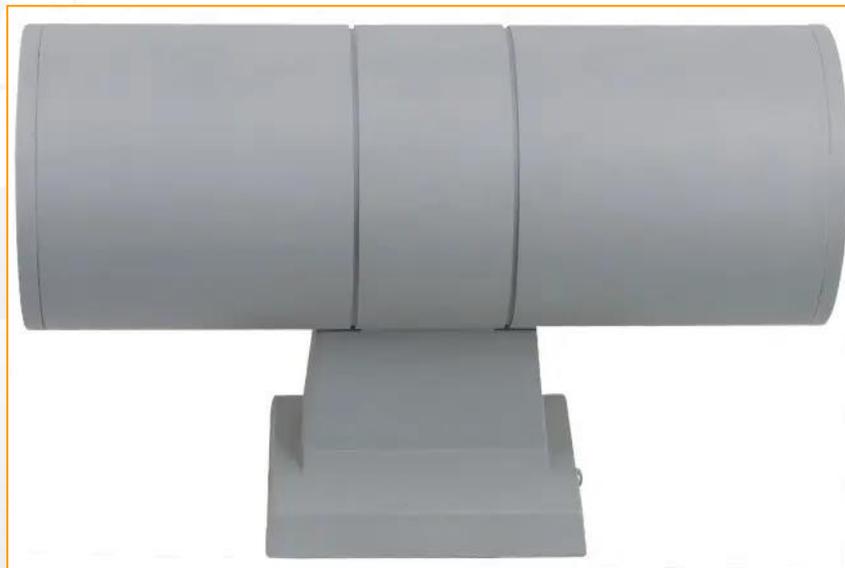

15 degree

30 degree

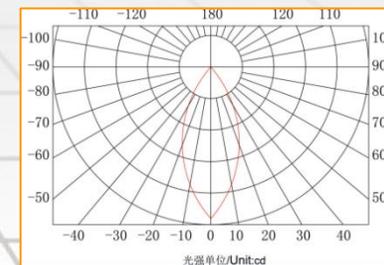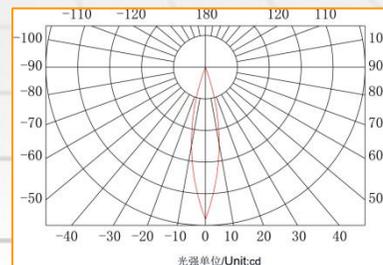



CM-FQ-Q2


Base specification

| Model | CM-FQ-Q2 | | | |
|-----------------------|--|--------|-------------------------|---------------|
| Light source | 9 pcs (single color) *2 | | Chip Led Osram 12 pcs*2 | |
| Control mode | ON/OFF | ON/OFF | ON/OFF | DMX512 |
| Color | R/G/B/W | W | R/G/B/W | RGBW /W color |
| Material | High strength aluminum base + Tempered glass | | | |
| Life span | 50,000 hours | | | |
| weight | 1.85kg | | | |
| Working Temperature | -20°C to 50°C | | | |
| Storage Temperature | -40°C to 70°C | | | |
| Input | DC24V / AC110-220V | | | |
| Power Consumption | 18W | 18W | 24W | 24W |
| Protection rat | IP66 | | | |
| Horizontal beam angle | 5°/8°/10°/15°/24°/30°/45°/60° | | | |
| Vertical beam angle | 5°/8°/10°/15°/24°/30°/45°/60° | | | |
| Base color | Black / aluminum (Customizable) | | | |
| Base color | Black / Clear | | | |
| Glue color | Black / Gray | | | |
| Cable color | Cat-5 / Cat-6 | | | |
| Data cable | All CM-main controller series | | | |
| Main controller | All CM-Sub controller series | | | |



CM-FQ-Q2

Physical Dimension

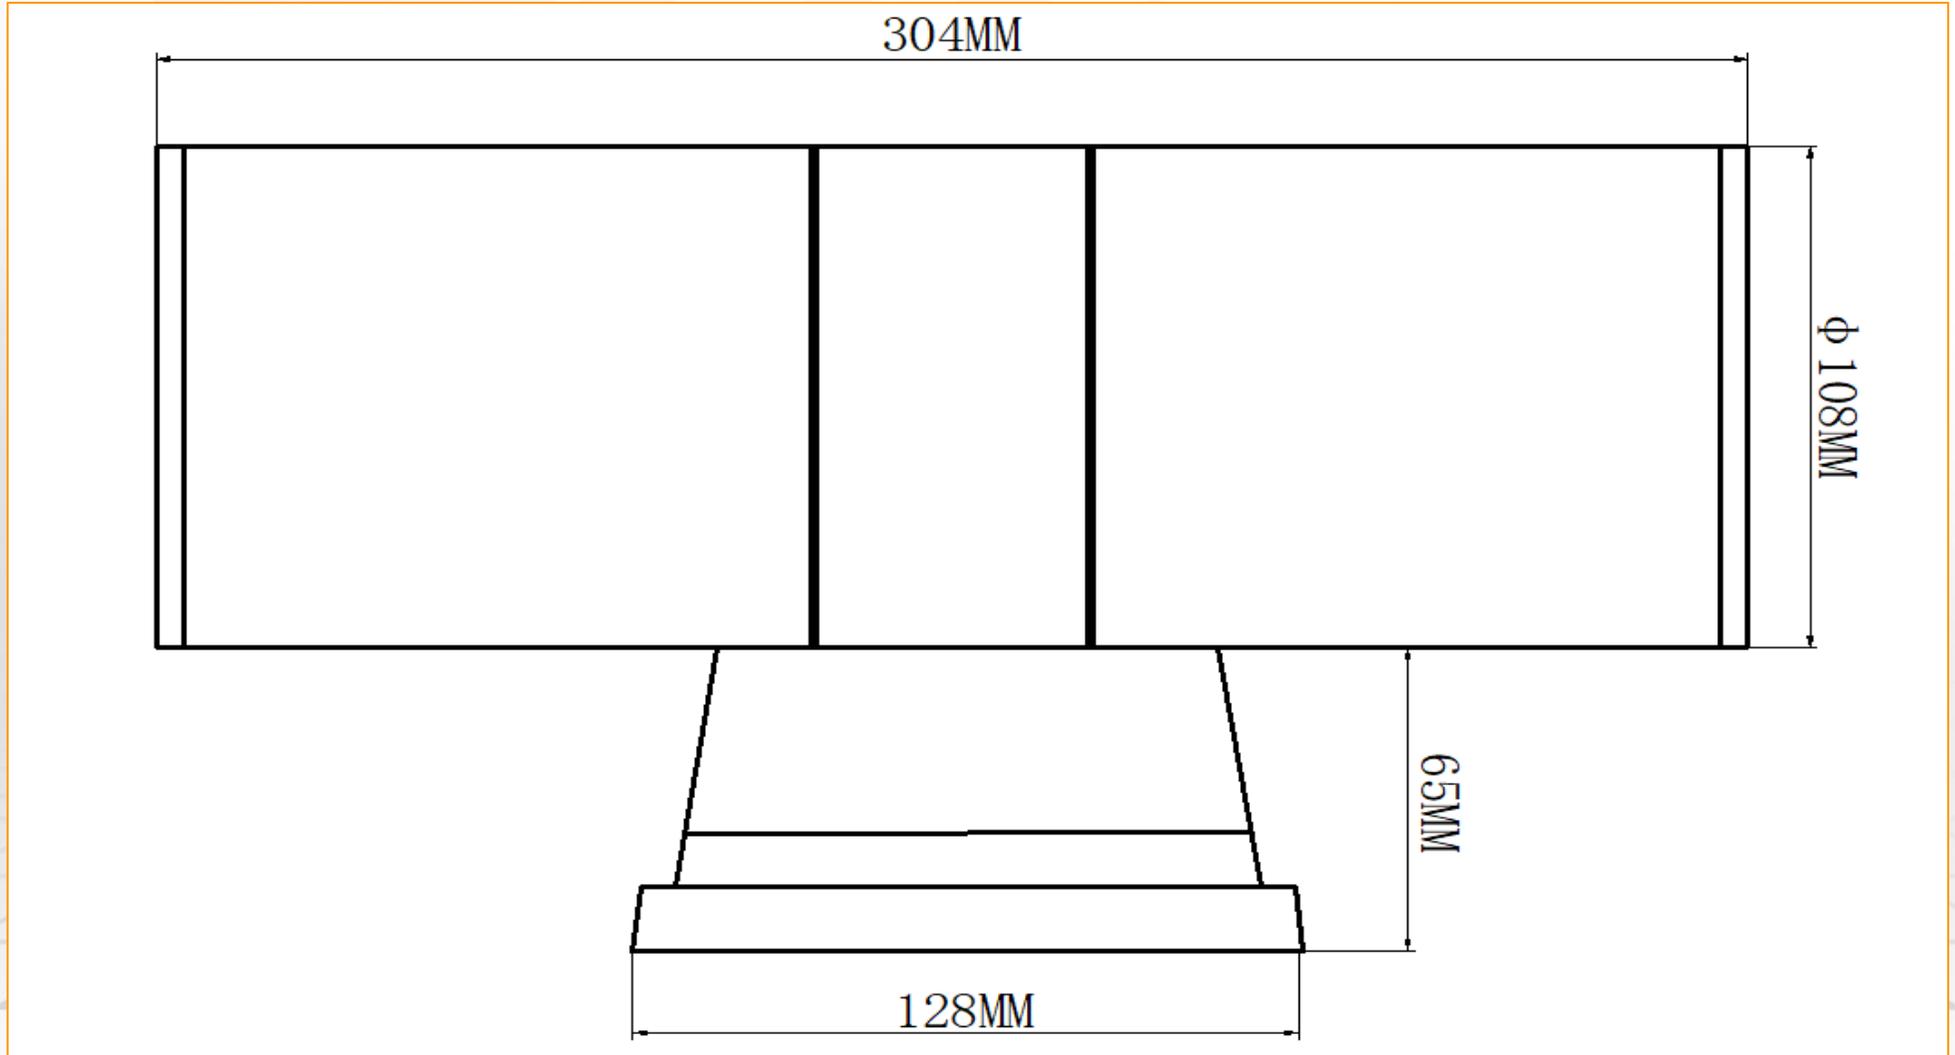



CM-FQ-Q2


Product features

- ◆ **Integrated anti drag design**
Clip on-off style connection and anti-pull connection without connector design.
- ◆ **Waterproof IP66**
High thermal conductivity transformer and full-sealed filling waterproof method by German imported glue.
- ◆ **ESD-protection**
Outdoor lighting protection and electrostatic discharge (ESD) protection design.
- ◆ **Efficient heat dissipation**
Aluminum alloy lamp body with low thermal resistance path heat dissipation design.



CM-FQ-Q2

Control system diagram

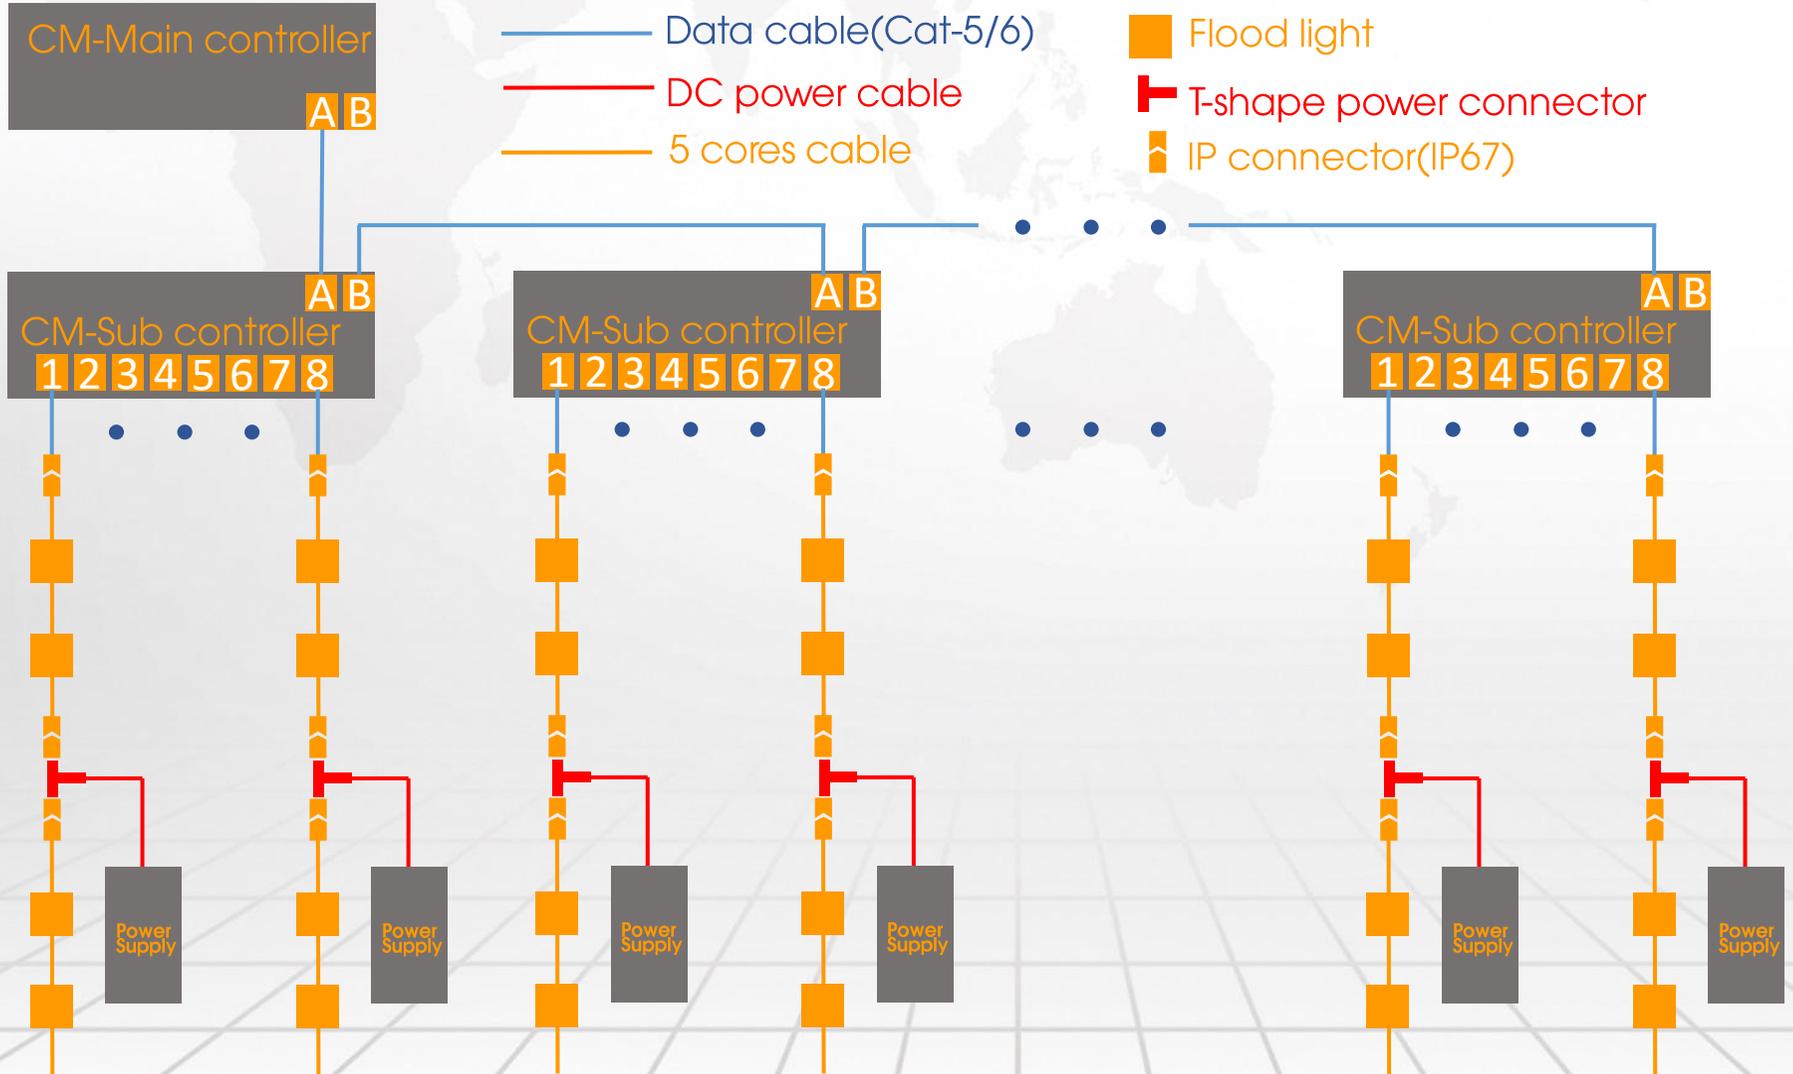



酷睿创显
Creative Media

We control the light, and the light serves you!