






酷睿创显
Creative Media

CM-FQ-Q3 Specification-V2.0

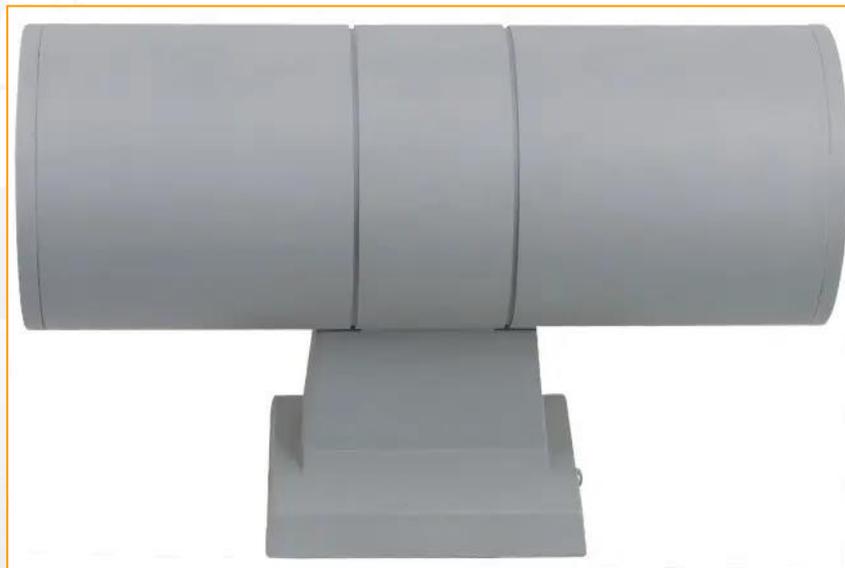

15 degree

30 degree

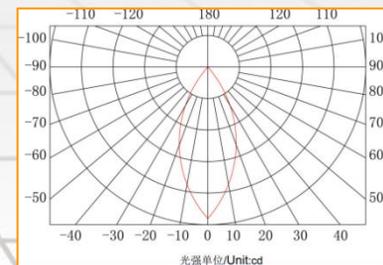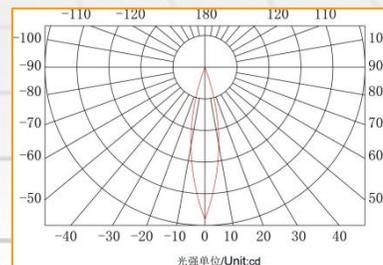



CM-FQ-Q3


Base specification

Model	CM-FQ-Q3			
Light source	15 pcs (single color) *2		18 pcs (single, 3 in 1, 4 in 1) *2	
Control mode	ON/OFF	ON/OFF	ON/OFF	DMX512
Color	R/G/B/W	W	R/G/B/W	RGBW full color
Material	High strength aluminum base + Tempered glass			
Life span	50,000 hours			
weight	2.25kg			
Working Temperature	-20°C to 50°C			
Storage Temperature	-40°C to 70°C			
Input	DC24V / AC110-220V			
Power Consumption	30W	30W	36W	36W
Protection rat	IP66			
Horizontal beam angle	8°/10°/15°/30°/45°/60°			
Vertical beam angle	8°/10°/15°/30°/45°/60°			
Base color	Black / aluminum (Customizable)			
Base color	Black / Clear			
Glue color	Black / Gray			
Cable color	Cat-5 / Cat-6			
Data cable	All CM-main controller series			
Main controller	All CM-Sub controller series			



CM-FQ-Q3

Physical Dimension

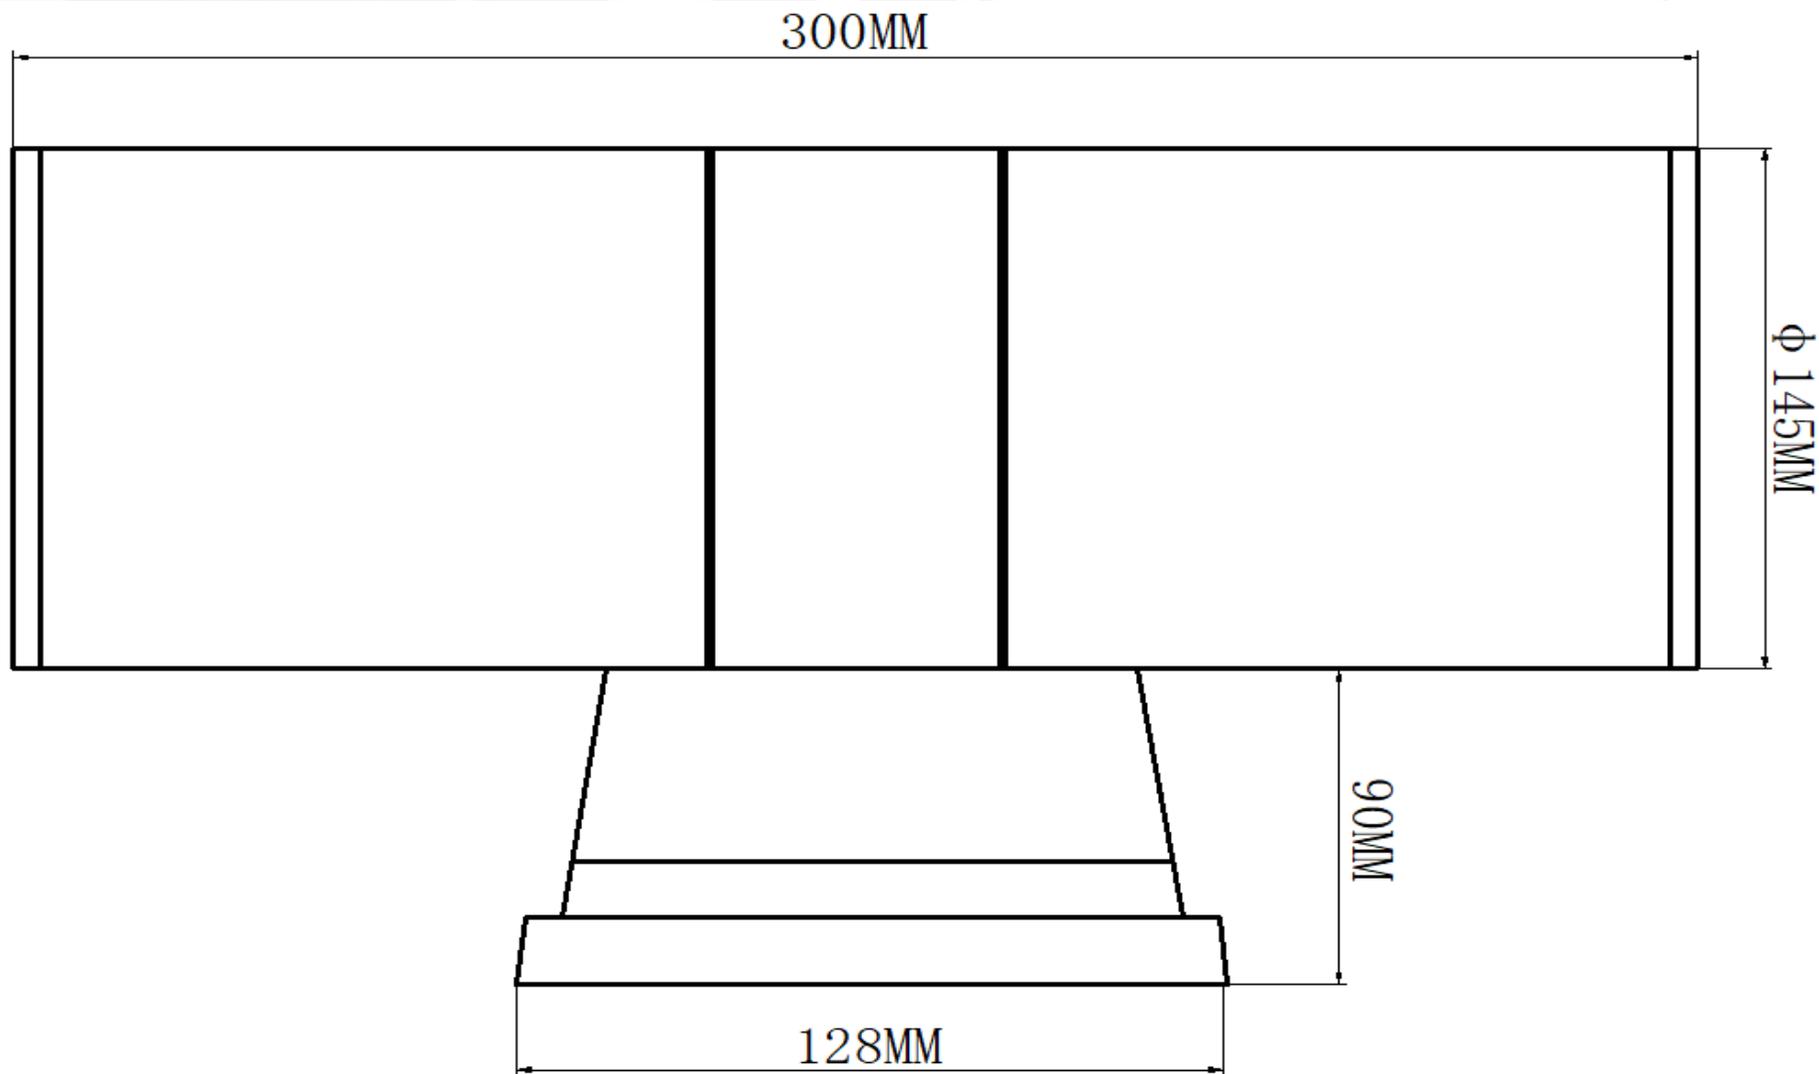



CM-FQ-Q3


Product features

- ◆ **Integrated anti drag design**
Clip on-off style connection and anti-pull connection without connector design.
- ◆ **Waterproof IP66**
High thermal conductivity transformer and full-sealed filling waterproof method by German imported glue.
- ◆ **ESD-protection**
Outdoor lighting protection and electrostatic discharge (ESD) protection design.
- ◆ **Efficient heat dissipation**
Aluminum alloy lamp body with low thermal resistance path heat dissipation design.



CM-FQ-Q3

Control system diagram

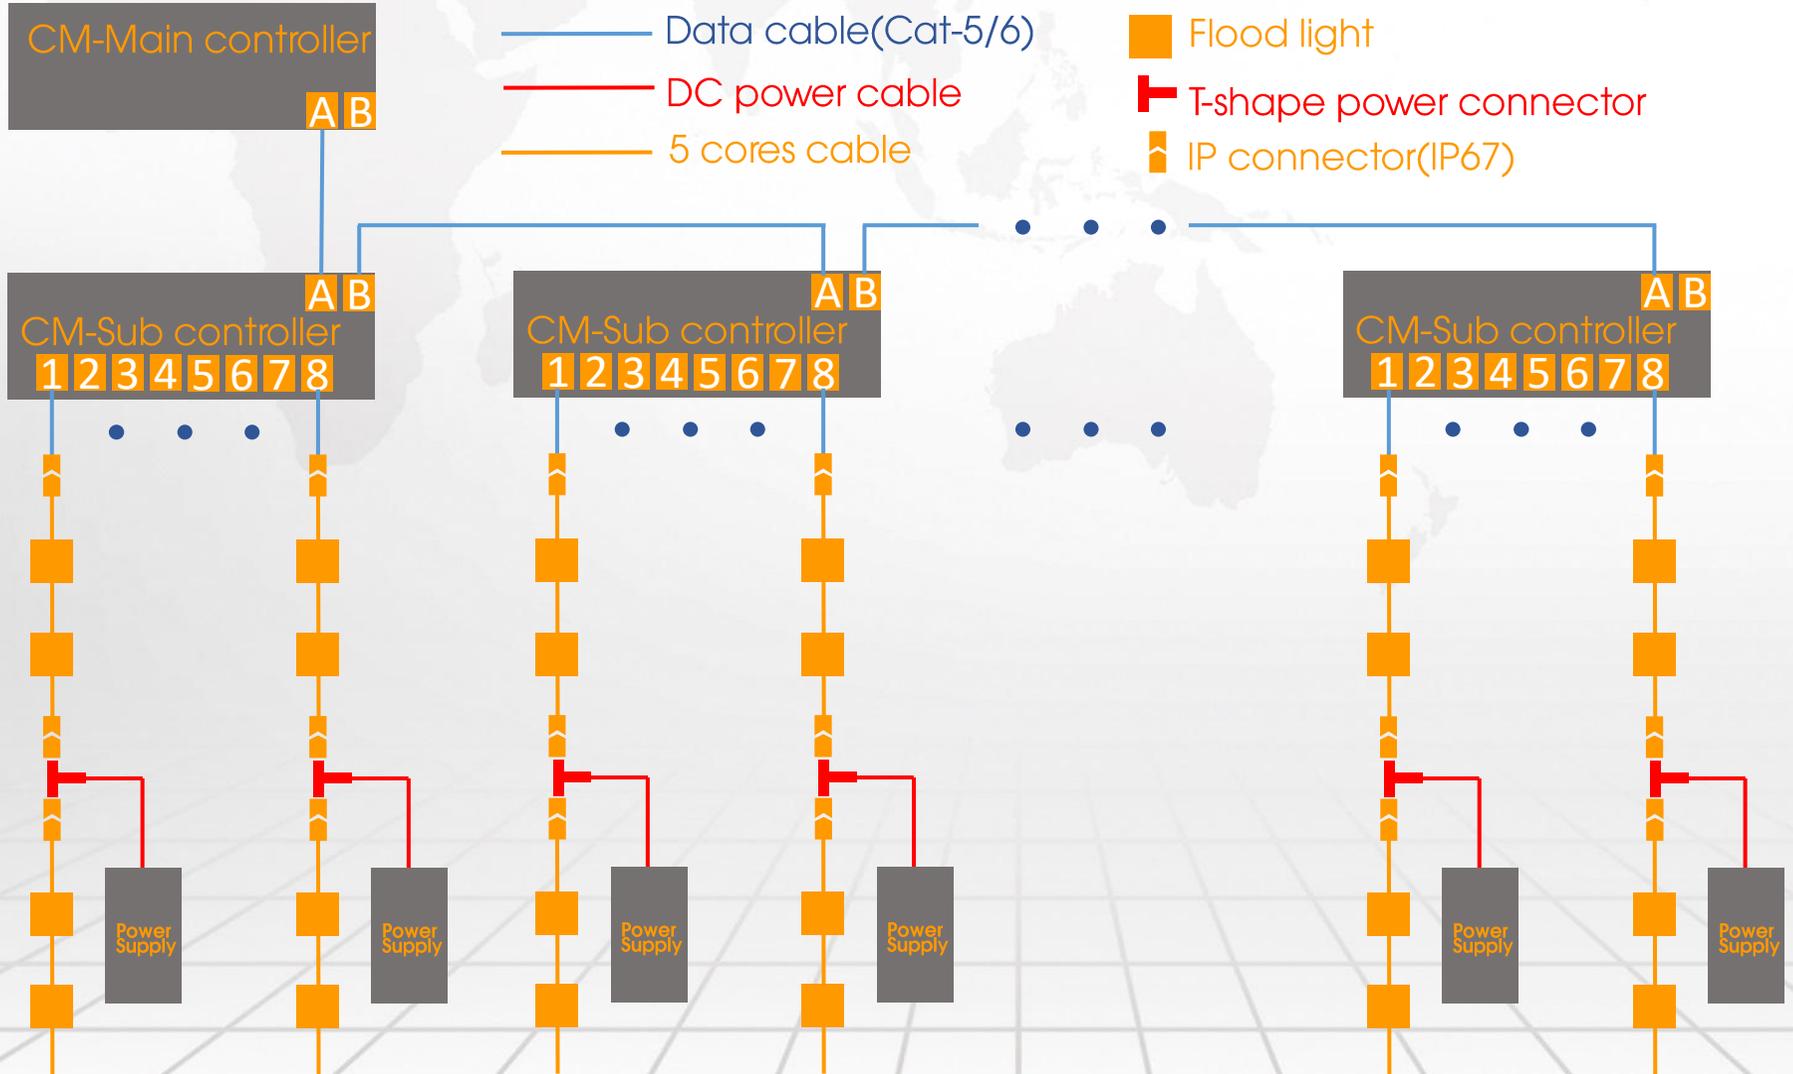



酷睿创显
Creative Media

We control the light, and the light serves you!